

Wheel specifications


Line Pro 30 TLR Boost — Front Wheel



Part description	Part number	
	27.5"	29"
Wheel	5333185 / 5333181	5333187 / 5333183
Rim*, carbon fiber, tubeless ready (black)	W5327299	W5325365
Spokes, straight pull, 14/16/14 G, drive side (black)	W5332449	W5332447
Spokes, straight pull, 14/16/14 G, non-drive side (black)		
Nipples, 14 G (black)	W5271560	
Rim strip, tubeless (30 mm)	W439597	W439598
Valve stem, tubeless (dark gray)	W527257	

*Not compatible with rim brakes

Hub service parts

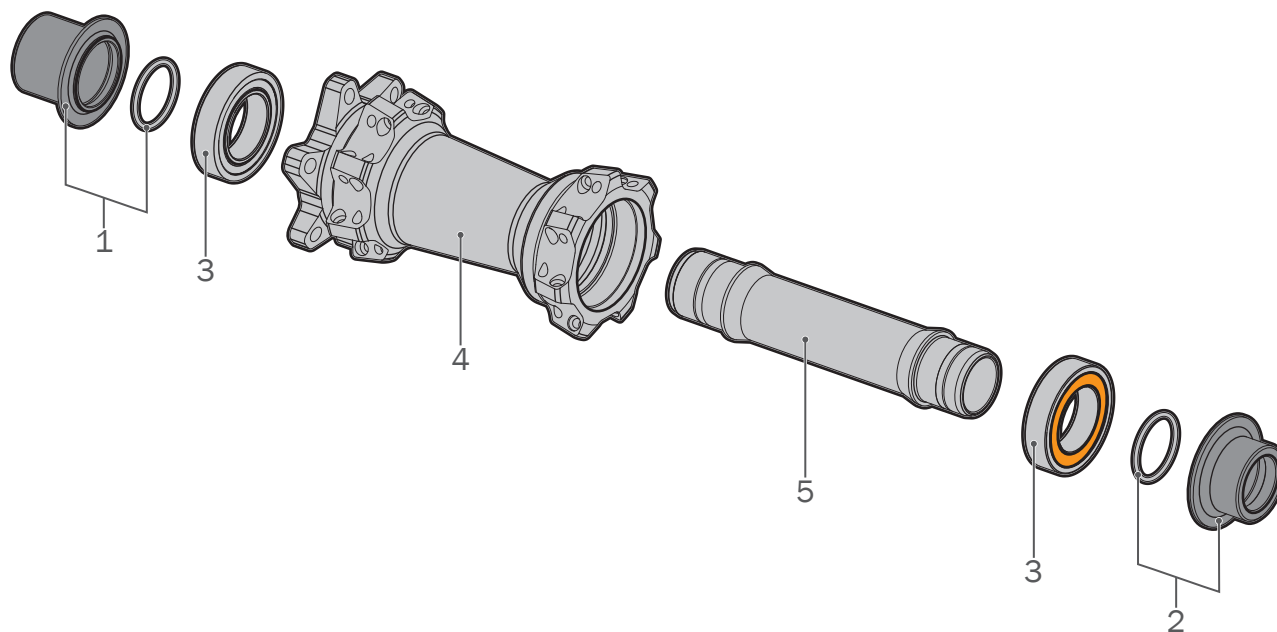


#	Part description	Part number
1	End cap, 15 mm, non-drive side*	431778
2	End cap, 15 mm, drive side*	
3	Bearings, 18307 LLH, 18 x 30 x 7 mm	5288411
4	Hub shell, 6-bolt rotor (108 T)	N/A
5	Axle, 15 mm ID inside diameter	5317782

*includes o-ring

Wheel specifications


Rim

#	Specification	Value
1	Height	25 mm
2	Outer width	38.7 mm
3	Inner width	28.6 mm
4	Offset spoke bed	2.85 mm
—	Spoke holes	28
—	Rim width, ISO	29 mm
—	Max tire pressure	50 PSI / 3.5 BAR
—	Tire interface	Hooked

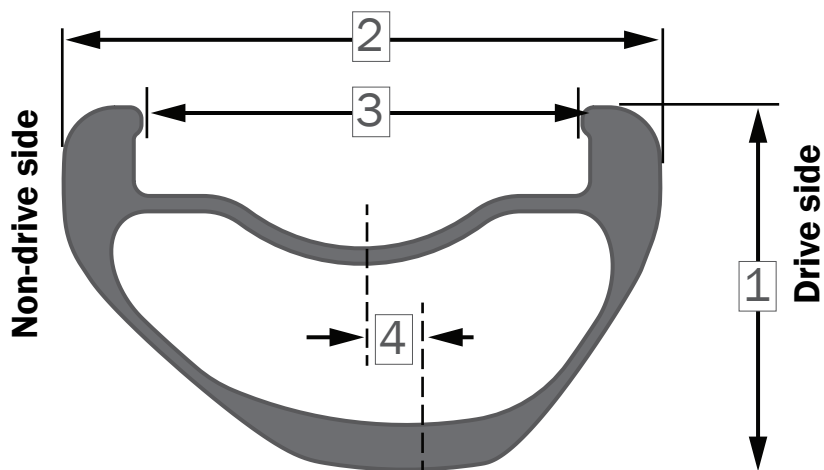

Wheel building information

#	Specification	Value	
		27.5"	29"
1	Spoke length, non-drive side	281 mm	301 mm
	Spoke length, drive side	282 mm	300 mm
2	Effective rim diameter	558 mm	596 mm
—	Bead seat diameter, ISO	584 mm	622 mm

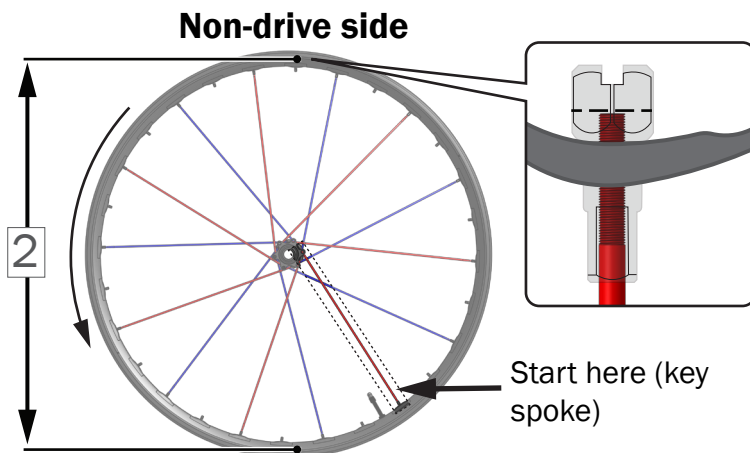

#	Specification		Value
3	Over locknut dimension		110 mm
4	Center to flange, non-drive side		27.5 mm
5	Center to flange, drive side		39 mm
—	Flange pitch circle diameter, non-drive side		40 mm
—	Flange pitch circle diameter, drive side		40 mm
—	Hop max		0.5 mm
—	Wobble max		0.5 mm
—	Dish max		1.0 mm
—	Lacing pattern		3 cross, woven
—	Spoke tension, non-drive side	Min	110 lbs / 50 kgf
		Max	*
—	Spoke tension, drive side	Min	190 lbs / 86 kgf
		Max	275 lbs / 125 kgf

*balance on non-drive side

