

Wheel specifications


Line Pro 30 TLR Boost — Rear Wheel




Part description	Part number	
	27.5"	29"
Wheel	5333186 / 5333182	5333186 / 5333182
Rim*, carbon fiber, tubeless ready (black)	W532799	W5325365
Spokes, straight pull, 14/16/14 G, driveside (black)	W5332449	W5332447
Spokes, straight pull, 14/16/14 G, non-driveside (black)		
Nipples, 14 G (black)	W5271560	
Rim strip, tubeless (30 mm)	W439597	W439598
Valve stem, tubeless (dark gray)	W527257	

*Not compatible with rim brakes


Hub service parts

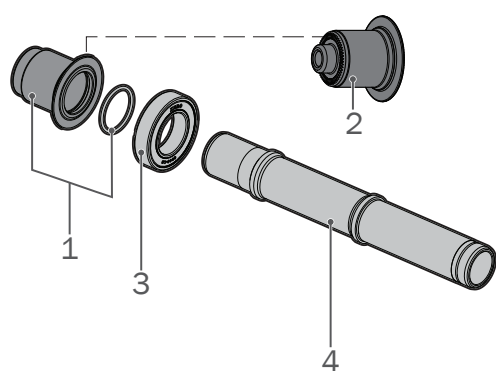


Underneath freehub




Shimano Micro Spline



Shimano HG



SRAM XD



#	Part description	Part number
1	End cap, 12 mm*	552407
2	End cap, 5 mm*	W562022
3	Bearings, 6903, 18 x 30 x 7 mm	5288405
4	Axle, 13.5 mm inside diameter	W542541
5	Hub shell, 6-bolt rotor (108 T)	N/A
6	Drive ring	W527053
7	Snap ring	W5293418
8	Pawls (3 pack)	552414


#	Part description	Part number
9	Springs (3 pack)	552415
10	SRAM freehub, XD	552411
11	Shimano freehub, Micro Spline	600718
12	Shimano freehub, HG	552410
13	End cap, 12 mm (short)*	552406
14	End cap, 12 mm (long)*	W586894
15	End cap, 5 mm (short)*	W527033
16	End cap, 5 mm (long)*	W5255095

*includes o-ring

Wheel specifications


Rim

#	Specification	Value
1	Height	25 mm
2	Outer width	38.7 mm
3	Inner width	28.6 mm
4	Offset spoke bed	2.85 mm
—	Spoke holes	28
—	Rim width, ISO	29 mm
—	Max tire pressure	50 PSI / 3.5 BAR
—	Tire interface	Hooked

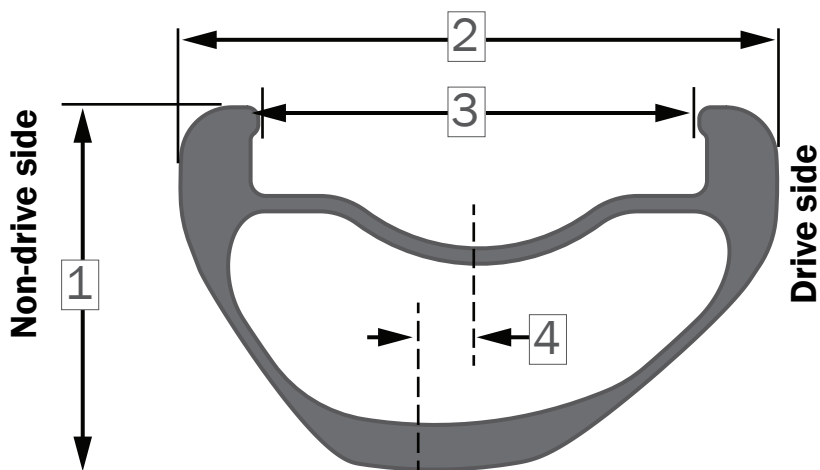

Wheel building information

#	Specification	Value	
		27.5"	29"
1	Spoke length, non-drive side	281 mm	301 mm
	Spoke length, drive side	280 mm	300 mm
2	Effective rim diameter	558 mm	596 mm
—	Bead seat diameter, ISO	584 mm	622 mm

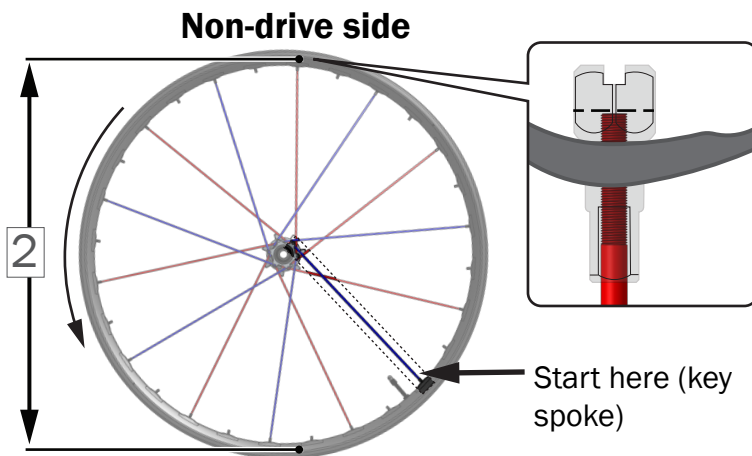

#	Specification		Value
3	Over locknut dimension		110 mm
4	Center to flange, non-drive side		39.5 mm
5	Center to flange, drive side		24.5 mm
—	Flange pitch circle diameter, non-drive side		40 mm
—	Flange pitch circle diameter, drive side		60 mm
—	Hop max		0.5 mm
—	Wobble max		0.5 mm
—	Dish max		1.0 mm
—	Lacing pattern		3 cross, woven
—	Spoke tension, non-drive side	Min	190 lbs / 86 kgf
		Max	275 lbs / 125 kgf
—	Spoke tension, drive side	Min	110 lbs / 50 kgf
		Max	*

*balance on drive side

